SWING GATES







# FX 330K

## **SWING GATE OPENERS**

- FX 330 K: Maximum weight/ length per gate leaf; 350kg/4m.
- 24V DC electro-mechanical gear motors for residential use.
- Worm gear provides durability and silence in motor operation.
- Hall sensor imbedded in the gear motor for accurately positioning.
- Slowdown during the ends of opening and closing phases.
- Single-gate or dual-gate installation is optional.





**WIRELESS SUPPORT** 

**24V DC** 












#### **TECHNICAL DATA**

| MODEL NO              | FX 330K           |
|-----------------------|-------------------|
| Gear Type             | Worm gear         |
| Max. Absorbed Power   | 144W              |
| Peak Thrust           | 3500N             |
| Nominal Thrust        | 3000N             |
| Stroke Length         | 350mm             |
| Power Supply          | 24V DC            |
| Current Rating        | 3A                |
| Maximum Gate Weight   | 350 kg per left   |
| Maximum Gate Length   | 4 meters per leaf |
| Operating Temperature | -20oC~+50oC       |
| Dimension             | 844x115x106mm     |
| Weight                | 6.25kg            |

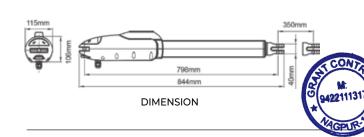

### **DESIGNED FOR RESIDENTIAL AND COMMERCIAL APPLICATION**





ACCESSORIES (OPTIONAL)





PHOTOCELL

LATCH & STOPPER



METAL FIXING PLATE

DU PONT WORM GEAR